


Series 3500 Double Hung Window

Also Available: Insulated Slider, Insulated Picture Window and Insulated Shapes

- Low-E Glass and insulating Argon Gas provide additional efficiency
- Beveled mainframe offers a true brick-mould appearance, which adds class and style
- Both sashes operate and tilt in for easy cleaning
- Aluminum-reinforced, multi-cavity construction provides additional thermal performance and structural integrity
- Warm-Edge Spacer System
- Fusion-welded sashes and frame add strength and boost thermal performance
- Low profile deluxe cam lock
- Constant force coil balance system permits easy sash movement
- Sloped sill reduces air infiltration and allows for easy water run-off
- Rounded sashes create additional beauty for the interior of your home
- Interlocking sashes keep out drafts
- Rubber bulb seal helps block outside air
- Heavy-duty, push button night latches provide carefree ventilation
- Half screen comes standard*
- Dual-fin weatherstripping further reduces air infiltration
- Integrated, slim-line lift rail allows you to easily operate sashes
- DP Rating R35 (DP50 option available)
- Transferable, Limited Lifetime Warranty
- 25-Year Glass Breakage Warranty standard



Color Options**

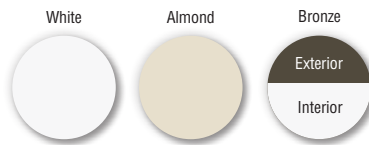

Featuring Our New Low Profile Lock



All products may be ordered to meet Energy Star requirements

Custom Options

- Low-E Glass
- Ultra Low-E / Argon Gas (may be required for Energy Star rating)
- 5/8" or 3/4" flat, 5/8" or 1" contoured, 5/8" contoured valance grids available
- Factory mulling of twins, triples and architectural shapes
- Obscure glass
- Double strength glass
- Full Screen
- DP-50 Wind Zone Rating
- Lifetime Glass Breakage Warranty

Scan and Experience the WeatherLok Website



*Screens are not meant to restrain a child from falling through an open window.
 **Printing process may affect color shown. Please refer to actual window sample when selecting colors.
 Manufacturer reserves the right to substitute components as necessary for continued product improvement. WL-3500-1/15